

# 微型称重传感器 50kgf~20kgf

## SM600E




### 特点

- 压缩式 Compression Type
- 适用于有限空间的应用
- 不锈钢(50kgf~2tf) 漆面钢(5tf~20tf)
- 防护等级IP67



LOAD CELL

额定量程(R.C)	Unit	50, 100, 200, 500kgf, 1, 2, 5, 10, 20tf
额定输出(R.O)	mV/V	2.0 ± 0.02
零点平衡	mV/V	0.0 ± 0.1
综合误差	%	0.15
重复性	%	0.05
蠕变(30min)	%	0.03
温度的影响		
零点值	%/10°C	0.05
输出值	%/10°C	0.10
激励电压		
推荐值	V	10
最大值	V	15
电阻值		
输入	Ω	420 ± 50
输出	Ω	350 ± 3.5
绝缘	MΩ	>2,000@DC 50V
补偿温度范围	°C	-10 ~ +40
工作温度范围	°C	-20 ~ +80

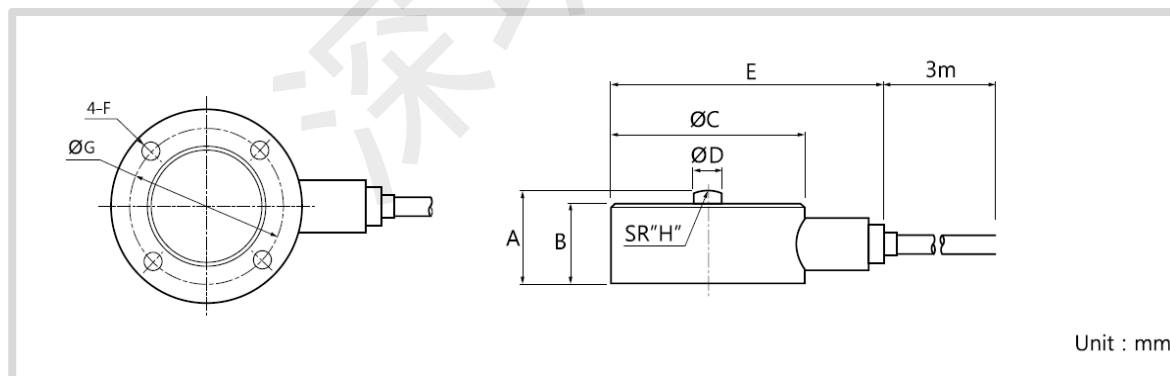

STANDARD CABLE LENGTH	
3M	
CABLE COLOR CODE	
EXC +	(RED)
EXC -	(WHITE)
SIG +	(GREEN)
SIG -	(BLUE, BLACK)
SHLD	(YELLOW)

量程	A	B	C	D	E	F	G
50kgf	25	21	50	10	65	M5x0.8 dp7	42
100kgf							
200kgf							
500kgf							
1tf	40	35	98	20	113	M6x1.0 dp8	72
2tf							
5tf							
10tf	45	40	98	20	113	M6x1.0 dp8	72
20tf	50	45	118	20	132	M8x1.25 dp15	90

SEWHACNM  
WEIGHING SOLUTION